

CONNECT SAFETY CLAMP 231 for AIRDUC 355

SKU: 2312970

Universal binding system with clamp shells, sealing insert, screws and nuts

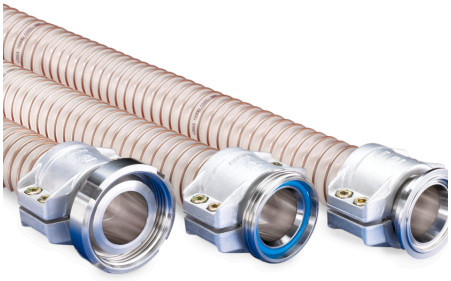

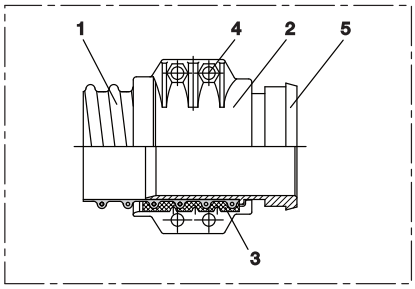

Pressure and temperature

Temperature normal range (min/max)

· -40 °C – 90 °C

Short-term temperature peak

· 125 °C

Material and colour

Main Material

· Aluminium

Material seal

· PU

Material

· aluminium

Durability and standards

Standards

· Food-grade sealing insert in accordance with: FDA 21 CFR 177.2600 and 178.2010, EU Regulation 10/2011, EC 1935/2004 and EU 2015/174
· REACH (EG 1907/2006)
· RoHS

All information in this technical data sheet has been carefully checked; however, no warranty or liability can be accepted for the accuracy, completeness or up-to-dateness of the information provided. Positive pressure and vacuum are operating limit values at 20 °C. The bending radius is measured on the inside of the hose bend. Subject to technical changes.

CONNECT SAFETY CLAMP 231 for AIRDUC 355

SKU: 2312970

Nominal width [mm]	Nominal size	For hose internal diameter [mm]	Weight [kg]	Article Number
25	25	25	0.18	23100252970
32	32	32	0.2	23100322970
38	38	38	0.21	23100382970
40	40	40	0.21	23100402970
50	50	50	0.35	23100502970
65	65	65	0.49	23100652970
75	75	75	0.57	23100752970
80	80	80	0.68	23100802970
100	100	100	1.38	23101002970

All information in this technical data sheet has been carefully checked; however, no warranty or liability can be accepted for the accuracy, completeness or up-to-dateness of the information provided. Positive pressure and vacuum are operating limit values at 20 °C. The bending radius is measured on the inside of the hose bend. Subject to technical changes.