

CONNECT SAFETY CLAMP 231 for 356

SKU: 2312971

Universal binding system with clamp shells, sealing insert, screws and nuts

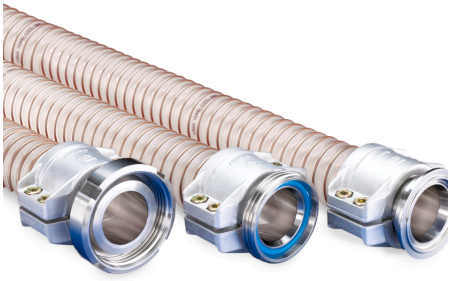

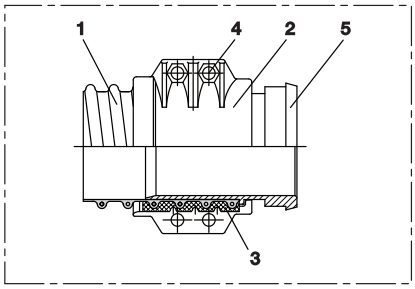

Areas of application

Applications

- Food production & conveying, Pharmaceutical, Vacuum conveyor, Dosing systems

Pressure and temperature

Temperature normal range (min/max)

- -40 °C – 90 °C

Short-term temperature peak

- 125 °C

Material and colour

Main Material

- Aluminium

Material

- aluminium

Durability and standards

Standards

- REACH (EG 1907/2006)
- Food-grade sealing insert in accordance with: FDA 21 CFR 177.2600 and 178.2010, EU Regulation 10/2011, EC 1935/2004 and EU 2015/174
- RoHS

Compatibility

Suitable for hose

- Airduc 356

All information in this technical data sheet has been carefully checked; however, no warranty or liability can be accepted for the accuracy, completeness or up-to-dateness of the information provided. Positive pressure and vacuum are operating limit values at 20 °C. The bending radius is measured on the inside of the hose bend. Subject to technical changes.

CONNECT SAFETY CLAMP 231 for 356

SKU: 2312971

Nominal width [mm]	Nominal size	For hose internal diameter [mm]	Weight [kg]	Article Number
32	32	32	0.19	23100322971
38	38	38	0.2	23100382971
40	40	40	0.2	23100402971
50	50	50	0.34	23100502971
65	65	65	0.49	23100652971
75	75	75	0.57	23100752971
80	80	80	0.68	23100802971
100	100	100	1.38	23101002971

All information in this technical data sheet has been carefully checked; however, no warranty or liability can be accepted for the accuracy, completeness or up-to-dateness of the information provided. Positive pressure and vacuum are operating limit values at 20 °C. The bending radius is measured on the inside of the hose bend. Subject to technical changes.