
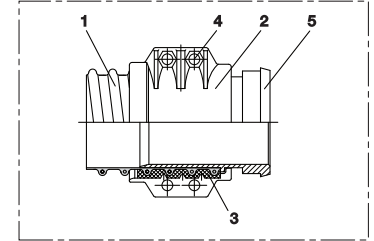


CONNECT SAFETY CLAMP 231 for 356

SKU: 2312971

Universelles Einbindesystem mit Klemmschalen, Dichteinsatz, Schrauben und Muttern

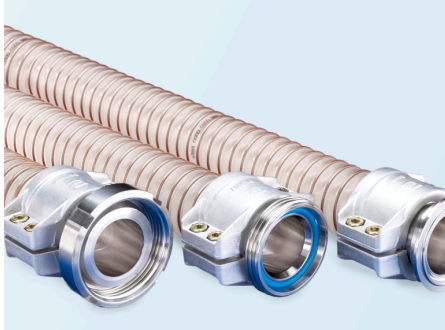

Compatibility

Suitable for hose: Airduc 356

Durability and standards

Standards:

REACH according to --> Technology / Technical Information / REACH

conforms to RoHS guideline

Dichteinsatz lebensmittelecht nach: FDA 21 CFR 177.2600 und 178.2010, EU-

Verordnung 10/2011, EG 1935/2004 und EU 2015/174

Material and colour

Hauptmaterial: Aluminium

Material:

aluminium

Pressure and temperature

Temperature normal range from: -40 °C

Temperature normal range to: 90 °C

Short-term temperature peak: 125 °C

Areas of application

Applications:

Food production & conveying

Pharmaceutical

Vacuum conveyor

Dosing systems

Nominal width	Nominal size	Clamping range min.	Clamping range max.	For hose internal diameter	Working pressure	Max. production length	Weight	Article Number
[mm]		[mm]	[mm]	[mm]	[bar]	[m]	[kg]	
38 mm	38 mm	53 mm	56 mm	38 mm	25 bar	0 m	0.2 kg	23100382971
32 mm	32 mm	-	-	32 mm	-	0 m	0.19 kg	23100322971
40 mm	40 mm	-	-	40 mm	-	0 m	0.2 kg	23100402971
50 mm	50 mm	-	-	50 mm	-	0 m	0.34 kg	23100502971
65 mm	65 mm	-	-	65 mm	-	0 m	0.49 kg	23100652971
75 mm	75 mm	-	-	75 mm	-	0 m	0.57 kg	23100752971
80 mm	80 mm	-	-	80 mm	-	0 m	0.68 kg	23100802971
100 mm	100 mm	-	-	100 mm	-	0 m	1.38 kg	23101002971