
CONNECT PRESS ASSEMBLY 232

SKU: 2322964



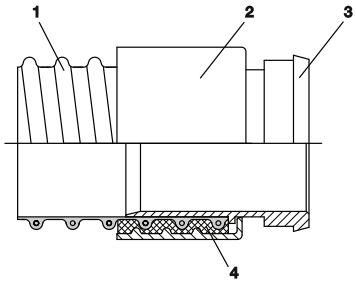

Areas of application

Applications

- Food production & conveying, Pharmaceutical, Dosing systems

Pressure and temperature

Temperature normal range (min/max)

- -40 °C – 90 °C

Durability and standards

Standards

- REACH (EG 1907/2006)
- Food-grade sealing insert in accordance with: FDA 21 CFR 177.2600 and 178.2010, EU Regulation 10/2011, EC 1935/2004 and EU 2015/174
- RoHS

Compatibility

Suitable for hose

- BARDUC 382

All information in this technical data sheet has been carefully checked; however, no warranty or liability can be accepted for the accuracy, completeness or up-to-dateness of the information provided. Positive pressure and vacuum are operating limit values at 20 °C. The bending radius is measured on the inside of the hose bend. Subject to technical changes.

CONNECT PRESS ASSEMBLY 232

SKU: 2322964

Nominal width mm [mm]	Nominal size	For hose internal diameter [mm]	Weight [kg]	Article Number
32	32	32	0.25	23200322964
40	40	40	0.32	23200402964
50	50	50	0.4	23200502964
65	65	65	0.48	23200652964
75	75	75	0.54	23200752964
100	100	100	0.67	23201002964

All information in this technical data sheet has been carefully checked; however, no warranty or liability can be accepted for the accuracy, completeness or up-to-dateness of the information provided. Positive pressure and vacuum are operating limit values at 20 °C. The bending radius is measured on the inside of the hose bend. Subject to technical changes.