
CONNECT PRESS ASSEMBLY 232 SYSTEM for 356

SKU: 2322973

Binding system (press sleeve, sealing insert); press sleeve stainless steel 1.4404 (stamped) = AISI 316L



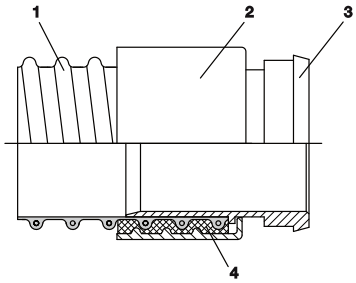

Pressure and temperature

Temperature normal range (min/max)

- -40 °C – 90 °C

Material and colour

Main Material

- Stainless steel

Material seal

- PU

Material

- Stainless steel (1.4404)

Durability and standards

Standards

- REACH (EG 1907/2006)
- Food-grade sealing insert in accordance with: FDA 21 CFR 177.2600 and 178.2010, EU Regulation 10/2011, EC 1935/2004 and EU 2015/174
- RoHS

Compatibility

Suitable for hose

- AIRDUC®: 356

All information in this technical data sheet has been carefully checked; however, no warranty or liability can be accepted for the accuracy, completeness or up-to-dateness of the information provided. Positive pressure and vacuum are operating limit values at 20 °C. The bending radius is measured on the inside of the hose bend. Subject to technical changes.

CONNECT PRESS ASSEMBLY 232 SYSTEM for 356

SKU: 2322973

Nominal width [mm]	Nominal size	For hose internal diameter [mm]	Weight [kg]	Article Number
50	50	50	0	23200502973
65	65	65	0.54	23200652973
75	75	75	0.65	23200752973
100	100	100	0.67	23201002973

All information in this technical data sheet has been carefully checked; however, no warranty or liability can be accepted for the accuracy, completeness or up-to-dateness of the information provided. Positive pressure and vacuum are operating limit values at 20 °C. The bending radius is measured on the inside of the hose bend. Subject to technical changes.