

PROTAPE© TPE 326 MEMORY

SKU: 3260000

Crush-resistant exhaust gas hose, highly flexible, vibration-resistant and fabric-reinforced, ideal for extracting hot engine exhaust gases up to 200°C.



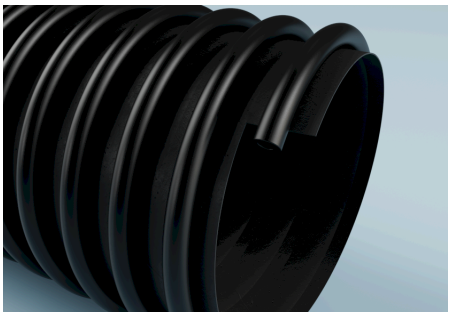

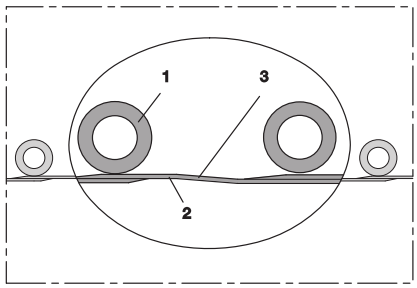

Technical specifications

Compressibility

· highly flexible + compressible

Medium

· Gas

Areas of application

Applications

· Waste gas exhaust, Exhaust air duct, Car gas extraction, Extraction arms, Extraction units, Engine exhaust gases, Slotted floor channel, Extraction

Industries

· Automotive industry, Extraction and filtration technology industry

Pressure and temperature

Temperature normal range (min/max)

· -40 °C – 200 °C

Temperature note

· Provided that flue gas funnels are used correctly and there is a sufficient supply of fresh air (approx. 50 per cent)

Material and colour

Colour

· black

Material

· EPDM/PP coated fabric

Material spiral

· TPV

Durability and standards

Standards

· REACH (EG 1907/2006), RoHS

All information in this technical data sheet has been carefully checked; however, no warranty or liability can be accepted for the accuracy, completeness or up-to-dateness of the information provided. Positive pressure and vacuum are operating limit values at 20 °C. The bending radius is measured on the inside of the hose bend. Subject to technical changes.

PROTAPE© TPE 326 MEMORY

SKU: 3260000

Inner diameter [mm]	Outer diameter [mm]	Vacuum [bar]	Total wall thickness [mm]	Bending radius [mm]	Max. production length [m]	Weight [kg]	Spiral pitch [mm]	Article Number
50.5	67.5	0.4	0.4	48	20	0.38	18,5	32600510000
64.5	81.5	0.28	0.4	53	20	0.48	18,5	32600630000
75.6	92.6	0.17	0.4	60	20	0.54	19	32600760000
80	97	0.055	0.4	65	20	0.57	19	32600800000
90	107	0.05	0.4	70	20	0.63	19	32600900000
101.5	118.5	0.05	0.4	71	20	0.71	19	32601020000
126.5	143.5	0.035	0.4	100	20	0.87	19	32601270000
151.5	168.5	0.03	0.4	110	20	1.04	19	32601520000
202.3	219.3	0.01	0.4	155	20	1.37	19	32602030000

All information in this technical data sheet has been carefully checked; however, no warranty or liability can be accepted for the accuracy, completeness or up-to-dateness of the information provided. Positive pressure and vacuum are operating limit values at 20 °C. The bending radius is measured on the inside of the hose bend. Subject to technical changes.