


NORPLAST® PVC 384 SCIROPPO®/AS

SKU: 4411

Food-grade suction and pressure hose, ideal for transporting liquid foods as well as powdery and granular media such as granules and wood pellets.

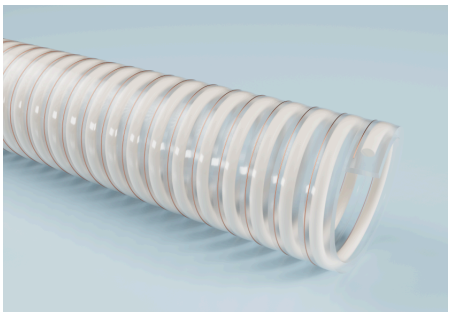

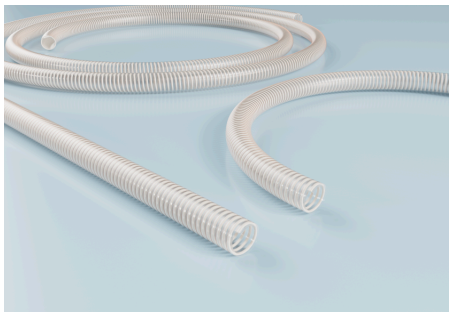

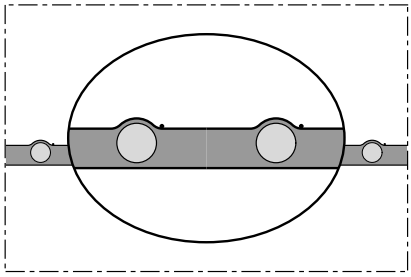

Technical specifications

Medium

· Gas, Dust, Liquid, Solid

Areas of application

Applications

· For liquid food products and powdered or granular media such as granules and wood pellets
· Pellet conveying

Industries

· Energy industry

Pressure and temperature

Temperature normal range (min/max)

· -15 °C – 60 °C

Material and colour

Material wire

· Copper

Colour

· Transparent

Colour of spiral

· Ivory

Material

· Soft PVC

Material spiral

· Rigid PVC

Durability and standards

Standards

· EU 10/2011 Cat. C, EN ISO 1307:2008, EU 10/2011 Cat. B, EU 10/2011 Cat. A, EU 1935/2004, LFGB (German Food and Feed Code)

Test conditions

· 5 minutes at 40 °C (Category E), 5 minutes at 40 °C (Category A), 5 minutes at 40 °C (Category B), 5 minutes at 40 °C (Category C)

Food standards

· EU 10/2011 Cat. E, EU 1935/2004, (GMP) EU 2023/2006, German Food and Feed Code (LFGB), EU 10/2011 Cat. A, EU 10/2011 Cat. C, EU 10/2011 Cat. B

Design and production

Construction outer cover

· Shallow corrugated

Description

Imprint

· NORPLAST PVC 384 Sciroppo®/AS - M - Abmessung - Reg. EU 10/2011

All information in this technical data sheet has been carefully checked; however, no warranty or liability can be accepted for the accuracy, completeness or up-to-dateness of the information provided. Positive pressure and vacuum are operating limit values at 20 °C. The bending radius is measured on the inside of the hose bend. Subject to technical changes.

NORPLAST® PVC 384 SCIROPPO®/AS

SKU: 4411

Inner diameter [mm]	Outer diameter [mm]	Working pressure at 20°C [bar]	Vacuum [bar]	Bending radius [mm]	Max. production length [m]	Weight [kg]	Spiral pitch [mm]	Article Number
25	31	7	0.7	100	50	0.32	7,5	4411025000
30	37	6.5	0.7	120	50	0.37	8	4411030000
32	38	7	0.7	128	50	0.41	8	4411032000
38	45	6	0.7	155	50	0.55	8,5	4411038000
40	47	6	0.7	160	50	0.56	8,5	4411040000
45	53	5.5	0.7	180	50	0.67	8,5	4411045000
51	59	5	0.7	204	50	0.82	9,5	4411050000
60	69	4.5	0.7	240	50	1	10	4411060000
65	74	4	0.7	260	50	1.1	10,5	4411065000
80	92	3.5	0.7	320	50	1.6	11	4411080000
90	102	3	0.7	360	50	1.9	13	4411090000

All information in this technical data sheet has been carefully checked; however, no warranty or liability can be accepted for the accuracy, completeness or up-to-dateness of the information provided. Positive pressure and vacuum are operating limit values at 20 °C. The bending radius is measured on the inside of the hose bend. Subject to technical changes.