
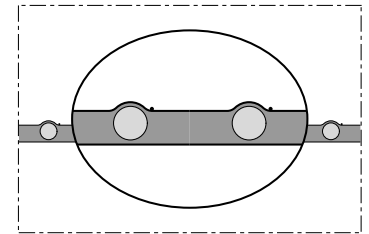
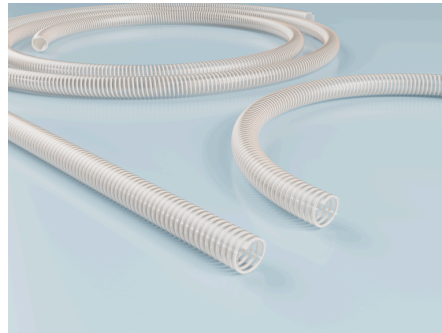


NORPLAST® PVC 384 SCIROPPO®/AS

SKU: 4411

Food-grade suction and pressure hose, ideal for transporting liquid foods as well as powdery and granular media such as granules and wood pellets.

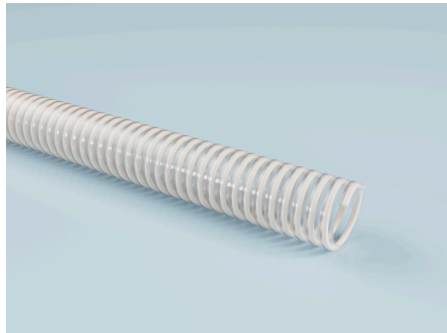

Description

Imprint: NORPLAST PVC 384 Sciroppo®/AS
- M - Abmessung - Reg. EU 10/2011

Design and production

Construction outer cover:
Slightly corrugated

Durability and standards

Standards:
EU 10/2011 Cat. C
EN ISO 1307:2008
EU 10/2011 Cat. B
EU 10/2011 Cat. A
EU 1935/2004
LFGB (German Food and Feed Code)

Test conditions:

5 minutes at 40 °C (Category E)
5 minutes at 40 °C (Category A)
5 minutes at 40 °C (Category B)
5 minutes at 40 °C (Category C)

Food standards:

EU 10/2011 Cat. E
EU 1935/2004
(GMP) EU 2023/2006
German Food and Feed Code (LFGB)
EU 10/2011 Cat. A
EU 10/2011 Cat. C
EU 10/2011 Cat. B

Material and colour

Colour of inner tube core: transparent
Colour of outer coating: transparent
Colour of spiral: Ivory

Material outer cover:

PVC

Material inner tube:

PVC

Pressure and temperature

Temperature normal range from: -15 °C
Temperature normal range to: 60 °C

Technical specifications

Medium:

Gas
Dust
Liquid
Solid

Inner diameter [mm]	Outer diameter [mm]	Working pressure at 20°C [bar]	Vacuum [bar]	Bending radius [mm]	Max. production length [m]	Weight [kg]	Inserts	Length [m]	Article Number
25 mm	31 mm	7 bar	0.7 bar	100 mm	50 m	0.32 kg	rigid PVC spiral Copper wire	50 m	4411025000
30 mm	37 mm	6.5 bar	0.7 bar	120 mm	50 m	0.37 kg	rigid PVC spiral Copper wire	50 m	4411030000
32 mm	38 mm	7 bar	0.7 bar	128 mm	50 m	0.41 kg	rigid PVC spiral Copper wire	50 m	4411032000
38 mm	45 mm	6 bar	0.7 bar	155 mm	50 m	0.55 kg	rigid PVC spiral Copper wire	50 m	4411038000

Overpressure and underpressure are recommended operating limits; products can be subjected to higher loads on request. The bend radius is measured along the inside of the hose bend. Subject to technical changes. All specifications are general guide values and refer to 20 °C. Further technical information: www.norres-baggerman.com.

NORPLAST® PVC 384 SCIROPPO®/AS

SKU: 4411

Inner diameter [mm]	Outer diameter [mm]	Working pressure at 20°C [bar]	Vacuum [bar]	Bending radius [mm]	Max. production length [m]	Weight [kg]	Inserts	Length [m]	Article Number
40 mm	47 mm	6 bar	0.7 bar	160 mm	50 m	0.56 kg	rigid PVC spiral Copper wire	50 m	4411040000
45 mm	53 mm	5.5 bar	0.7 bar	180 mm	50 m	0.67 kg	rigid PVC spiral Copper wire	50 m	4411045000
51 mm	59 mm	5 bar	0.7 bar	204 mm	50 m	0.82 kg	rigid PVC spiral Copper wire	50 m	4411050000
60 mm	69 mm	4.5 bar	0.7 bar	240 mm	50 m	1 kg	rigid PVC spiral Copper wire	50 m	4411060000
65 mm	74 mm	4 bar	0.7 bar	260 mm	50 m	1.1 kg	rigid PVC spiral Copper wire	50 m	4411065000
80 mm	92 mm	3.5 bar	0.7 bar	320 mm	50 m	1.6 kg	rigid PVC spiral Copper wire	50 m	4411080000
90 mm	102 mm	3 bar	0.7 bar	360 mm	50 m	1.9 kg	rigid PVC spiral Copper wire	50 m	4411090000

Overpressure and underpressure are recommended operating limits; products can be subjected to higher loads on request. The bend radius is measured along the inside of the hose bend. Subject to technical changes. All specifications are general guide values and refer to 20 °C. Further technical information: www.norres-baggerman.com.