
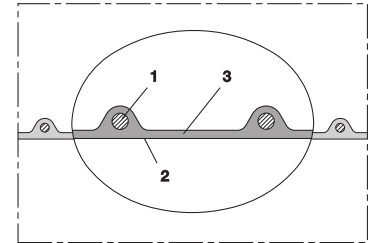
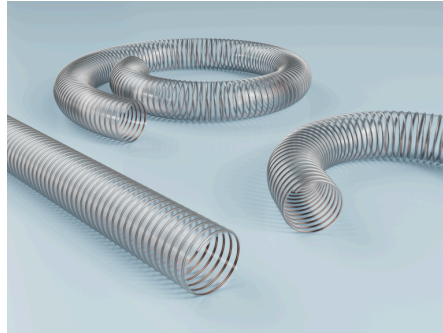


TIMBERDUC® PUR 533 AS

SKU: 5332173

Highly abrasion-resistant suction and delivery hose for the wood industry, antistatic, increased pressure and vacuum resistance, flame-retardant, ideal for woodworking and industry

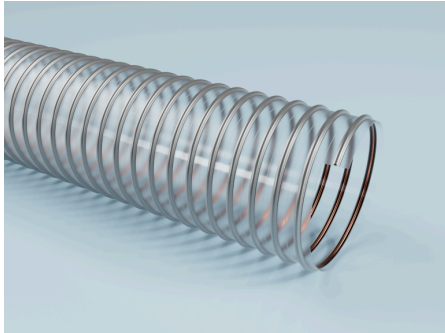

Durability and standards

Standards:

REACH according to --> Technology /
Technical Information / REACH
conforms to RoHS guideline
flame-retardant according to: DIN 4102-B1

Pressure and temperature

Temperature normal range from: -40 °C

Temperature normal range to: 90 °C

Inner diameter	Bending radius	Max. production length	Weight	Article Number
[mm]	[mm]	[m]	[kg]	
100 mm	98 mm	16 m	1.2 kg	53301002173
104 mm	100 mm	15 m	1.24 kg	53301042173