METALHOSE Agraff VA 150 AD

SKU: 1509010

Extremely robust metal protection conduit, highly flexible, liquid-tight, ideal for cable protection in electrical and switch cabinet installations and switchgear construction.



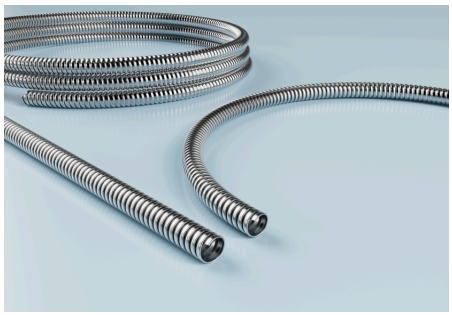

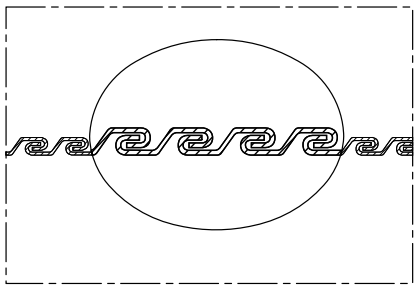

All information in this technical data sheet has been carefully reviewed; however, no warranty or liability can be accepted for the accuracy, completeness, or currentness of the information provided. Positive pressure and vacuum are operating limit values at 68 °F (20 °C). The bend radius is measured on the inside of the hose bend. Subject to technical changes.

METALHOSE Agraff VA 150 AD

SKU: 1509010

Areas of application

Applications

- Waste gas exhaust, Exhaust air duct, Car gas extraction, Aluminum smelters, Asbestos sanitation, Heaters for construction sites, Construction drying, Coating systems, Extraction of chemical vapours, CNC maschines, Overhead heater, Dedusting systems, Spray mist extraction, Film blowing machines, Rock drills, Granulate dryer, Granulate conveying, Wood chips, Wood dust extraction, Industrial vacuum cleaners, Cable protection, Welding fume extraction, Welding robots, Tent heating, Explosion hazard areas, Blow-in insulation, Plant cleaning, Chemical conveying, Chemical transport, Dosing systems, Venting, Waste management technology, Paints and coatings, Grain conveying, Ventilation, Ventilation systems, Compressed air, Sandblasting, Chip extraction, Injection moulding machines, Clothes dryer

Industries

- Chemical industry
- Ceramic industry
- Textile industry
- Construction industry
- Printing industry
- Energy industry
- Glass industry
- Wood industry
- Mechanical engineering
- Cleaning industry
- Shipbuilding
- Machine tool industry
- Cleaning machine industry
- Environmental and cleaning technology
- Extraction and filtration technology industry
- Renewable energy industry
- Pump and compressor industry
- Fluid technology / flow technology
- Screening machine industry
- Conveying and processing industry / bulk material technology
- Surface technology
- Waste and recycling industry
- Heating, ventilation, air conditioning and refrigeration (HVAC) industry
- Metal industry
- Mining industry
- Beverage industry

Pressure and temperature

Temperature normal range (min/max)

- 0 °C – 600 °C

Durability and standards

Standards

- IP 40 to EN/ IEC 60529, RoHS

All information in this technical data sheet has been carefully reviewed; however, no warranty or liability can be accepted for the accuracy, completeness, or currentness of the information provided. Positive pressure and vacuum are operating limit values at 68 °F (20 °C). The bend radius is measured on the inside of the hose bend. Subject to technical changes.

METALHOSE Agraff VA 150 AD

SKU: 1509010

Nominal width connecting parts [mm]	Inner diameter [mm]	Outer diameter [mm]	Bending radius hose center [mm]	Max. production length [m]	Weight [kg]	Packing unit	Article Number
7	5	7	35	10	1	10	15030079010
7	5	7	35	50	5	50	15030079050
8	6	8	40	10	1.2	10	15030089010
8	6	8	40	50	6	50	15030089050
10	8	10	45	10	1.3	10	15030109010
10	8	10	45	50	6.5	50	15030109050
14	11	14	50	10	1.4	10	15030149010
14	11	14	50	50	7	50	15030149050
17	14	17	60	10	2.6	10	15030179010
17	14	17	60	50	13	50	15030179050
19	16	19	65	10	2.9	10	15030199010
19	16	19	65	50	14.5	50	15030199050
21	18	21	70	10	3.1	10	15030219010
21	18	21	70	50	15.5	50	15030219050
27	23	27	90	50	20	50	15030279050
36	32	36	135	10	7.4	10	15030369010
36	32	36	135	25	18.5	25	15030369025

All information in this technical data sheet has been carefully reviewed; however, no warranty or liability can be accepted for the accuracy, completeness, or currentness of the information provided. Positive pressure and vacuum are operating limit values at 68 °F (20 °C). The bend radius is measured on the inside of the hose bend. Subject to technical changes.