
CONNECT 228

SKU: 2280000

Elastic polyurethane clamp protection tape, resistant to chemicals and highly abrasion-resistant, heat resistant up to 255°F.

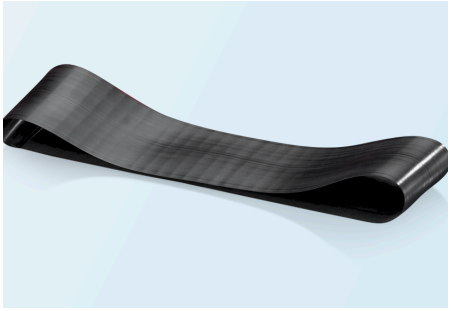

Pressure and temperature

Temperature normal range (min/max)

· -40 °C – 90 °C

Short-term temperature peak

· 125 °C

Material and color

Color seal

· black

Durability and standards

Standards

· REACH (EG 1907/2006), RoHS

Compatibility

Suitable for hose

· AIRDUC ® : 341 + 345 + 363; 350 (AS/ FOOD-AS / AS BLACK); 351 + 355 + 356 (FOOD / INOX FOOD-AS / EC / HT); 355 + 356 AS; 362 (FOOD / EC); PROTAPE ® : 335 + 371 HT-PVC; 326 + 327 MEMORY; 330 (AS / FOOD / AS BLACK / INOX FOOD-AS); 301 AS; 310 + 320 + 321 + 370 + 371; 322 EC; CP: 450 + 455 + 457 + 460 + 461 + 465 + 466 + 467 + 476 + 480 + 481 + 483 + 485 + 486 + 487; 450 + 461 PROTECT; 457 + 459 + 465 EC; 471 + 472 + 475 (INOX / INOX EC); NORPLAST ® : 383 + 388; 385 (AS / C-AS); TIMBERDUC ® : 531 - 533 AS; EVA: 373; 373 (AS / EC); NEO: 390 (ONE / TWO); SIL: 391 (ONE / TWO)

All information in this technical data sheet has been carefully reviewed; however, no warranty or liability can be accepted for the accuracy, completeness, or currentness of the information provided. Positive pressure and vacuum are operating limit values at 68 °F (20 °C). The bend radius is measured on the inside of the hose bend. Subject to technical changes.

CONNECT 228

SKU: 2280000

For hose internal diameter [mm]	Weight [kg]	Article Number
38	0.01	22800380000
51	0.1	22800500000
60	0.01	22800600000
65	0.001	22800630000
76	0.01	22800750000
90	0.01	22800900000
102	0.01	22801000000
115	0.01	22801150000
125	0.01	22801250000
150	0.01	22801500000
160	0.01	22801600000
165	0.01	22801650000
180	0.01	22801800000
200	0.01	22802000000

All information in this technical data sheet has been carefully reviewed; however, no warranty or liability can be accepted for the accuracy, completeness, or currentness of the information provided. Positive pressure and vacuum are operating limit values at 68 °F (20 °C). The bend radius is measured on the inside of the hose bend. Subject to technical changes.