

# CONNECT SAFETY CLAMP 231 for AIRDUC 355

SKU: 2312970

Universal clamp shell coupling system with sealing insert, bolts and nuts

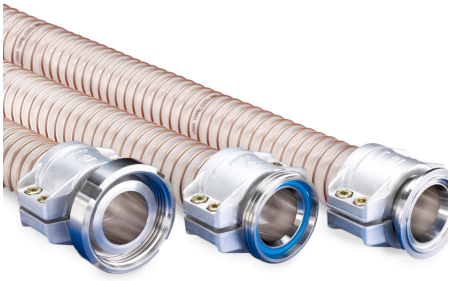

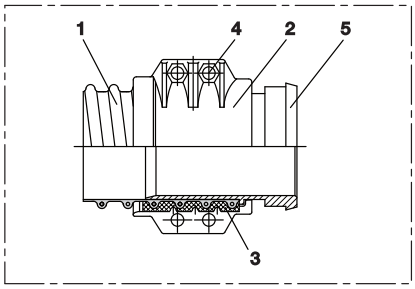


## Pressure and temperature

### Temperature normal range (min/max)

· -40 °C – 90 °C

### Short-term temperature peak

· 125 °C

## Material and color

### Main Material

· Aluminum

### Material seal

· PU

### Material

· aluminum

## Durability and standards

### Standards

· sealing insert food-grade according to: FDA 21 CFR 177.2600 and 178.2010, EU Regulation 10/2011, EC 1935/2004 and EU
· REACH (EG 1907/2006)
· RoHS

All information in this technical data sheet has been carefully reviewed; however, no warranty or liability can be accepted for the accuracy, completeness, or currentness of the information provided. Positive pressure and vacuum are operating limit values at 68 °F (20 °C). The bend radius is measured on the inside of the hose bend. Subject to technical changes.

# CONNECT SAFETY CLAMP 231 for AIRDUC 355

SKU: 2312970

| Nominal width [ mm ] | Nominal size | For hose internal diameter [ mm ] | Weight [ kg ] | Article Number |
|---|---|---|---|---|
| 25 | 25 | 25 | 0.18 | 23100252970 |
| 32 | 32 | 32 | 0.2 | 23100322970 |
| 38 | 38 | 38 | 0.21 | 23100382970 |
| 40 | 40 | 40 | 0.21 | 23100402970 |
| 50 | 50 | 50 | 0.35 | 23100502970 |
| 65 | 65 | 65 | 0.49 | 23100652970 |
| 75 | 75 | 75 | 0.57 | 23100752970 |
| 80 | 80 | 80 | 0.68 | 23100802970 |
| 100 | 100 | 100 | 1.38 | 23101002970 |

All information in this technical data sheet has been carefully reviewed; however, no warranty or liability can be accepted for the accuracy, completeness, or currentness of the information provided. Positive pressure and vacuum are operating limit values at 68 °F (20 °C). The bend radius is measured on the inside of the hose bend. Subject to technical changes.