
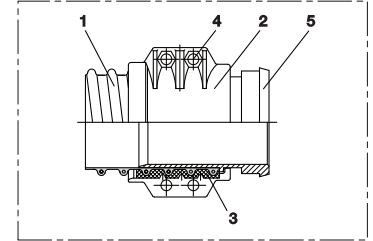


# CONNECT SAFETY CLAMP 231 for 356

SKU: 2312971

Universal clamp shell coupling system with sealing insert, bolts and nuts

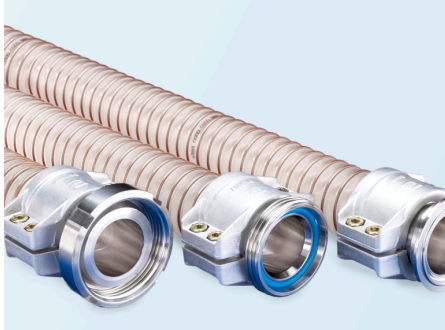

## Compatibility

Suitable for hose: Airduc 356

## Durability and standards

### Standards:

REACH according to --> Technology /  
Technical Information / REACH

conforms to RoHS guideline

sealing insert food-grade according to: FDA  
21 CFR 177.2600 and 178.2010, EU

Regulation 10/2011, EC 1935/2004 and EU

## Material and color

Hauptmaterial: Aluminum

Material:

aluminum

## Pressure and temperature

Temperature normal range from: -40 °C

Temperature normal range to: 90 °C

Short-term temperature peak: 125 °C

## Areas of application

### Applications:

Food production & conveying

Pharmaceutical

Vacuum conveyor

Dosing systems

Nominal width	Nominal size	Clamping range min.	Clamping range max.	For hose internal diameter	Working pressure	Max. production length	Weight	Article Number
[ mm ]		[ mm ]	[ mm ]	[ mm ]	[ bar ]	[ m ]	[ kg ]	
38 mm	38 mm	53 mm	56 mm	38 mm	25 bar	0 m	0.2 kg	23100382971
32 mm	32 mm	-	-	32 mm	-	0 m	0.19 kg	23100322971
40 mm	40 mm	-	-	40 mm	-	0 m	0.2 kg	23100402971
50 mm	50 mm	-	-	50 mm	-	0 m	0.34 kg	23100502971
65 mm	65 mm	-	-	65 mm	-	0 m	0.49 kg	23100652971
75 mm	75 mm	-	-	75 mm	-	0 m	0.57 kg	23100752971
80 mm	80 mm	-	-	80 mm	-	0 m	0.68 kg	23100802971
100 mm	100 mm	-	-	100 mm	-	0 m	1.38 kg	23101002971

Over and under pressure are recommended operating limits, products can be subjected to higher loads on request. The bending radius is measured through the inside of the hose bend. Subject to technical changes. All specifications are general guide values and refer to 20 °C. Further technical information: [www.norres-baggerman.com](http://www.norres-baggerman.com).