

INDUFORM®/RR

SKU: 3000

High-quality ribbed water hose, ideal for reels and medium-duty applications in industry, construction and shipping.

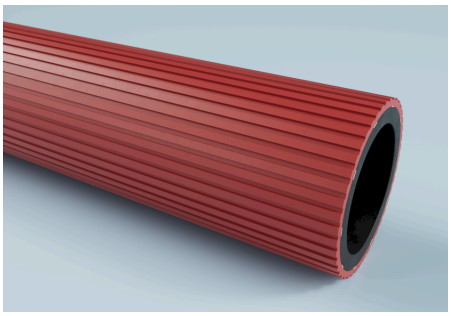

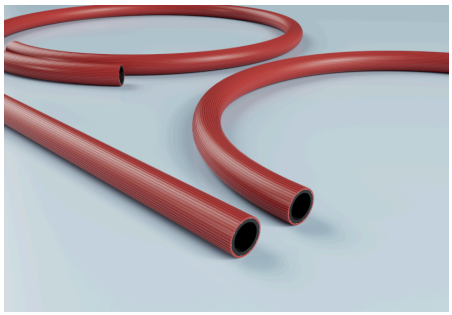

Areas of application

Applications

- Irrigation, Roof drainage, Air supply hose, Water hose, Irrigation, Compressors, Marine hoses

Industries

- Paper industry
- Textile industry
- Agricultural industry
- Aquaculture
- Construction industry
- Energy industry
- Horticulture
- Mechanical engineering
- Cleaning industry
- Shipbuilding
- Automotive industry
- Pump and compressor industry
- Pneumatic and hydraulic industry
- Heating, ventilation, air conditioning and refrigeration (HVAC) industry
- Mining industry

Pressure and temperature

Temperature normal range (min/max)

- -20 °C – 60 °C

Material and color

Color of inner tube core

- black

Color of outer cover

- red

Material outer cover

- Soft PVC

Material inner tube

- Soft PVC

Durability and standards

Standards

- EN ISO 1307:2008

Design and production

Construction outer cover

- Ribbed

Inserts

- polyester plies

All information in this technical data sheet has been carefully reviewed; however, no warranty or liability can be accepted for the accuracy, completeness, or currentness of the information provided. Positive pressure and vacuum are operating limit values at 68 °F (20 °C). The bend radius is measured on the inside of the hose bend. Subject to technical changes.

INDUFORM®/RR

SKU: 3000

Inner diameter [mm]	Outer diameter [mm]	Working pressure at 20°C [bar]	Burst pressure [bar]	Total wall thickness [mm]	Bending radius [mm]	Max. production length [m]	Weight [kg]	Article Number
13	19	10	30	3	80	100	0.205	3000013000
19	26	10	30	3.5	110	100	0.34	3000019000
25	33	10	30	4	150	40	0.495	3000025000
32	44	10	30	6	180	40	0.975	3000032000

All information in this technical data sheet has been carefully reviewed; however, no warranty or liability can be accepted for the accuracy, completeness, or currentness of the information provided. Positive pressure and vacuum are operating limit values at 68 °F (20 °C). The bend radius is measured on the inside of the hose bend. Subject to technical changes.