


Robust EPDM water hose, kink and impact resistant, can be driven over. For demanding applications in industry, agriculture and construction.

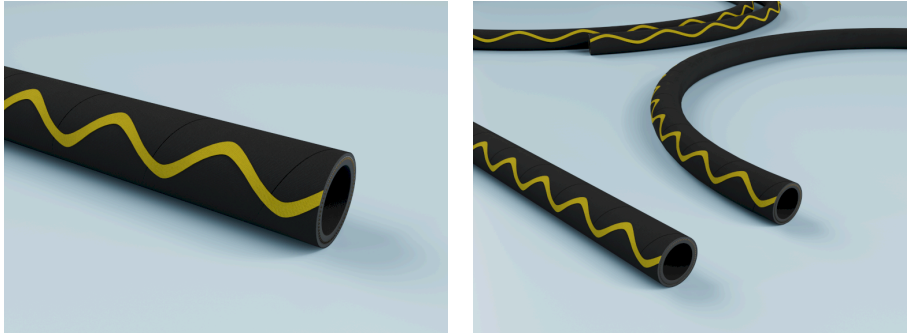

Design and production

Construction outer cover:
Wrapped

Durability and standards

Standards:
EN ISO 1307:2008

Durability outer cover:
Aging-resistant
Ozone-resistant
Weather-resistant
UV resistant
Abrasion-resistant
Oil resistant

Material and color

Color of inner tube core: black
Color of outer cover: black
Material outer cover:
CR

Material inner tube:
EPDM

Pressure and temperature

Temperature normal range from: -30 °C

Temperature normal range to: 100 °C

Max. cleaning temperature with steam:
130 °C

Areas of application

Applications:
Asbestos sanitation
Irrigation
Roof drainage
Pressure pump
Rock drills
Swimming pool cleaning
Toilet discharging
Water hose
Filling systems
Wastewater disposal
Plant cleaning
Irrigation
Hot water operation
High-pressure cleaning
High-temperature applications
Cooling water
Mineral oils
Injection moulding machines
Tank cleaning
Tunnel construction

Process and fresh water conveying

Industries:

Chemical industry
Ceramic industry
Paper industry
Textile industry
Agricultural industry
Aquaculture
Construction industry
Printing industry
Energy industry
Horticulture
Glass industry
Plastics industry
Mechanical engineering
Cleaning industry
Tobacco industry
Automotive industry
Machine tool industry
Waste disposal and environmental technology
Municipal technology

Technical specifications

Medium:
Liquid

Inner diameter	Outer diameter	Working pressure	Total wall thickness	Bending radius	Max. production length	Weight	Length	Inserts	Article Number
[mm]	[mm]	[bar]	[mm]	[mm]	[m]	[kg]	[m]		
13 mm	20.8 mm	30 bar	3.9 mm	50 mm	40 m	0.225 kg	40 m	textile plies	3026013000
19 mm	27.8 mm	25 bar	4.4 mm	80 mm	40 m	0.385 kg	40 m	textile plies	3026019000

SKU: 3026

Inner diameter	Outer diameter	Working pressure	Total wall thickness	Bending radius	Max. production length	Weight	Length	Inserts	Article Number
[mm]	[mm]	[bar]	[mm]	[mm]	[m]	[kg]	[m]		
25 mm	34 mm	20 bar	4.5 mm	160 mm	40 m	0.49 kg	40 m	textile plies	3026025000