

NITROGEN/YELLOW

SKU: 3031

Highly flexible, antistatic hose for transporting air, water and nitrogen, ideal for industrial applications, including petrochemical processes.

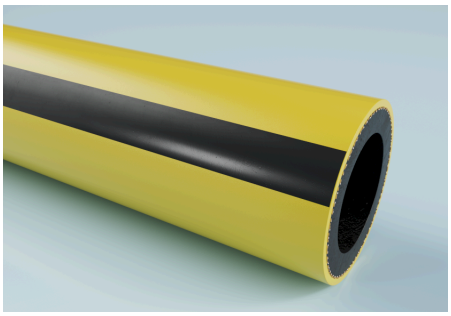

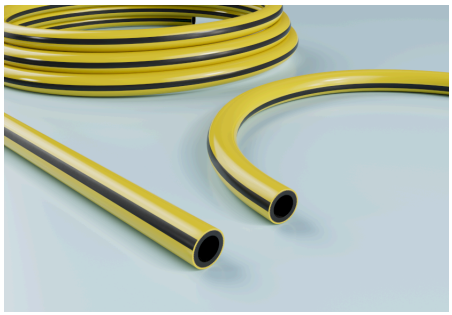

Areas of application

Applications

· Vapour return hose, Gas transport, Marine hoses, Mineral oils

Industries

· Chemical industry, Construction industry, Energy industry, Mechanical engineering, Medical technology, Metal industry

Pressure and temperature

Temperature normal range (min/max)

· -20 °C – 60 °C

Material and color

Color of inner tube core

· black

Color of outer cover

· yellow

Material outer cover

· Soft PVC

Material inner tube

· Soft PVC

Durability and standards

Standards

· EN ISO 1307:2008

Design and production

Longitudinal stripes

· 2 black antistatic longitudinal stripes <10^9 Ω

Construction outer cover

· Smooth

Inserts

· Aramid fabric layer

All information in this technical data sheet has been carefully reviewed; however, no warranty or liability can be accepted for the accuracy, completeness, or currentness of the information provided. Positive pressure and vacuum are operating limit values at 68 °F (20 °C). The bend radius is measured on the inside of the hose bend. Subject to technical changes.

NITROGEN/YELLOW

SKU: 3031

Inner diameter [mm]	Outer diameter [mm]	Working pressure at 20°C [bar]	Burst pressure [bar]	Total wall thickness [mm]	Bending radius [mm]	Max. production length [m]	Weight [kg]	Article Number
19.5	30	25	75	5.25	100	40	0.55	3031019000

All information in this technical data sheet has been carefully reviewed; however, no warranty or liability can be accepted for the accuracy, completeness, or currentness of the information provided. Positive pressure and vacuum are operating limit values at 68 °F (20 °C). The bend radius is measured on the inside of the hose bend. Subject to technical changes.