
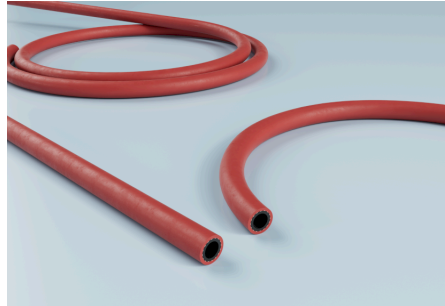


TEMPERFORM/RED

SKU: 3127

Extremely flexible cooling water hose, buckling resistant, resistant to high and low temperatures, ideal for temperature control applications in injection moulding technology. Red construction cover.

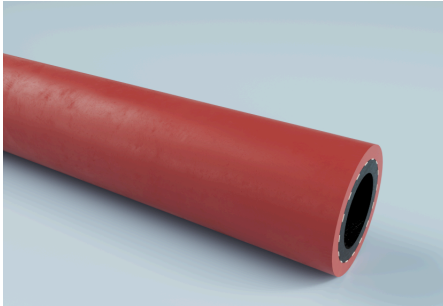

Technical specifications

Medium

- Gas, Dust, Liquid, Solid

Areas of application

Applications

- Aluminum smelters, Coating systems, Municipal vehicles, Water hose, Hot water operation, Cooling water, Injection moulding machines, Tunnel construction

Industries

- Paper industry, Textile industry, Agricultural industry, Construction industry, Plastics industry, Mechanical engineering, Municipal technology, Cleaning machine industry, Environmental and cleaning technology, Surface technology, Automation industry, Metal industry, Mining industry

Pressure and temperature

Temperature normal range (min/max)

- -20 °C – 100 °C

Material and color

Color of inner tube core

- black

Color of outer cover

- red

Material outer cover

- EPDM

Material inner tube

- EPDM

Durability and standards

Standards

- EN ISO 1307:2008

Durability outer cover

- Ozone-resistant, UV resistant

Design and production

Construction outer cover

- Smooth

Inserts

- textile plies

Inner tube

- Extruded

Compatibility

Type of assembly

- Clamp mounting

TEMPERFORM/RED

SKU: 3127

Inner diameter	Outer diameter	Working pressure at 20°C	Burst pressure	Total wall thickness	Bending radius	Max. production length	Weight	Length	Article Number
[mm]	[mm]	[bar]	[bar]	[mm]	[mm]	[m]	[kg]	[m]	
9.5	18	20	60	4.25	75	40	0.265	40	3127009001
12.7	22	20	60	4.65	100	40	0.365	40	3127013001