
SILOCORD®/ALIM

SKU: 3560

Abrasion-resistant and food-grade pressure hose, highly wear-resistant and insulating, ideal for transporting highly abrasive materials and dry foodstuffs.



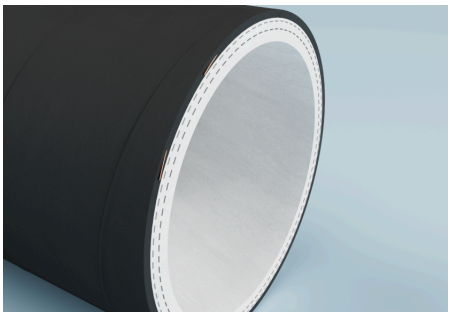

Technical specifications

Interior abrasion value

· 100 mm3

Medium

· Gas, Dust, Liquid, Solid

Areas of application

Applications

· Conveying of abrasive media, Feed transport, Grain conveying, Food production & conveying, Material conveying, Animal feed

Industries

· Chemical industry, Agricultural industry, Construction industry, Plastics industry, Mechanical engineering, Silo and conveying technology industry

Pressure and temperature

Temperature normal range (min/max)

· -35 °C – 80 °C

Max. cleaning temperature with steam

· 130 °C

Material and color

Material wire

· Copper

Color of inner tube core

· White

Color of outer cover

· black

Material outer cover

· SBR

Material inner tube

· NR

Durability and standards

Standards

· FDA (CFR 21 § 177.2600), BfR XXI:2002 (Cat. 4), EN ISO 1307:2008, EU 1935/2004, ISO 4649 (formerly DIN 53516)

Food standards

· BfR XXI:2002 (Cat. 4), EU 1935/2004, (GMP) EU 2023/2006

Design and production

Construction outer cover

· Wrapped

Inserts

· textile plies

Inner tube

· Smooth

Description

Imprint

· Silocord® / Alim Granulate - PN 8 bar - BfR XXI Kat. 4 - FDA

All information in this technical data sheet has been carefully reviewed; however, no warranty or liability can be accepted for the accuracy, completeness, or currentness of the information provided. Positive pressure and vacuum are operating limit values at 68 °F (20 °C). The bend radius is measured on the inside of the hose bend. Subject to technical changes.

SILOCORD®/ALIM

SKU: 3560

Inner diameter [mm]	Outer diameter [mm]	Working pressure [bar]	Burst pressure [bar]	Total wall thickness [mm]	Bending radius [mm]	Max. production length [m]	Weight [kg]	Article Number
75	93	8	24	9	550	40	3	3560075000
100	120	8	24	10	750	40	4.4	3560100000

All information in this technical data sheet has been carefully reviewed; however, no warranty or liability can be accepted for the accuracy, completeness, or currentness of the information provided. Positive pressure and vacuum are operating limit values at 68 °F (20 °C). The bend radius is measured on the inside of the hose bend. Subject to technical changes.