

EUROLON®

SKU: 4010

High-quality PVC flat hose, ideal for water supply and drainage as well as irrigation in horticulture, agriculture and industry.

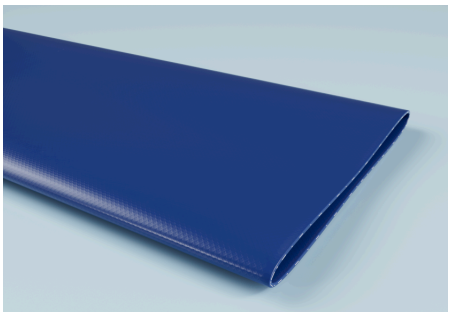

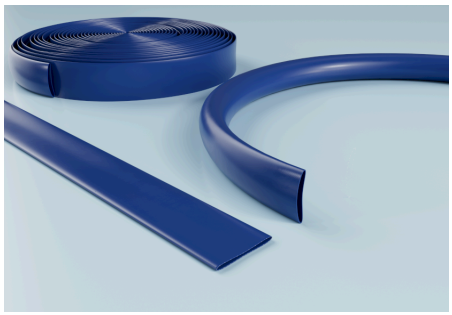

Technical specifications

Medium

· Liquid

Areas of application

Applications

· Irrigation, Swimming pool cleaning, Water hose, Wastewater disposal, Irrigation, Process and fresh water conveying

Industries

· Agricultural industry, Aquaculture, Construction industry, Horticulture, Municipal services, Municipal technology

Pressure and temperature

Temperature normal range (min/max)

· -20 °C – 60 °C

Material and color

Color

· Blue

Color of inner tube core

· Blue

Color of outer cover

· Blue

Material outer cover

· Soft PVC

Material inner tube

· Soft PVC

Durability and standards

Standards

· EN ISO 1307:2008

All information in this technical data sheet has been carefully reviewed; however, no warranty or liability can be accepted for the accuracy, completeness, or currentness of the information provided. Positive pressure and vacuum are operating limit values at 68 °F (20 °C). The bend radius is measured on the inside of the hose bend. Subject to technical changes.

EUROLON®

SKU: 4010

Inner diameter [mm]	Outer diameter [mm]	Working pressure [bar]	Total wall thickness [mm]	Max. production length [m]	Weight [kg]	Article Number
25	29	7	2	50	0.18	4010025000
32	36	7	2	100	0.21	4010032000
38	42	7	2	100	0.24	4010038000
51	55	7	2	100	0.35	4010050000
63	67	7	2	100	0.45	4010063000
76	80	6	2	100	0.61	4010075000
102	106	6	2	100	0.92	4010100000
127	131	6	2	50	1.15	4010125000
152	156	6	2	50	1.57	4010150000
203	207	4	2	50	2.15	4010200000

All information in this technical data sheet has been carefully reviewed; however, no warranty or liability can be accepted for the accuracy, completeness, or currentness of the information provided. Positive pressure and vacuum are operating limit values at 68 °F (20 °C). The bend radius is measured on the inside of the hose bend. Subject to technical changes.