


NORFLEX© SIL 408

SKU: 4080000

Food-grade silicone hose, highly flexible and crush-resistant, heat-resistant up to 350°F, ideal for applications in the food and pharmaceutical industry.

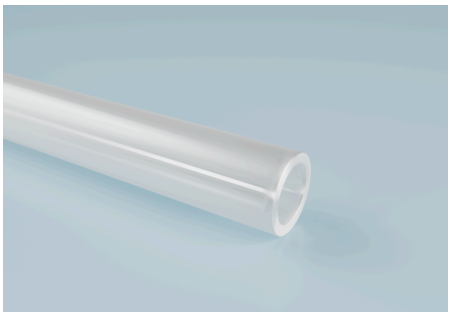

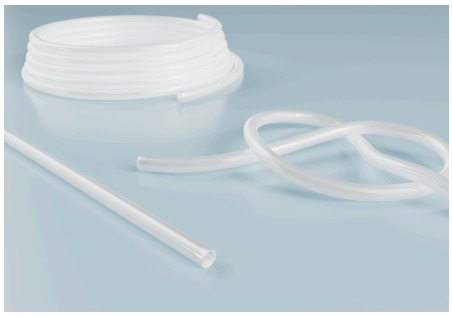

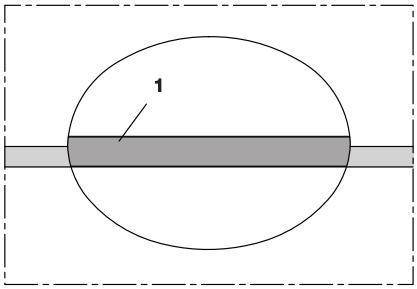

Technical specifications

Medium

- Gas, Dust, Liquid, Solid

Areas of application

Applications

- Heaters for construction sites, Pharmaceutical, Hose pumps, Tablet presses, Water hose, Tent heating, Filling systems, Heating, Gas transport, Beverage filling, Food production & conveying, Food pumps, Dairy products, Milk processing

Industries

- Food industry
- Pharmaceutical industry
- Pump and compressor industry
- Medical technology
- Heating, ventilation, air conditioning and refrigeration (HVAC) industry
- Beverage industry

Pressure and temperature

Temperature normal range (min/max)

- -60 °C – 180 °C

Material and color

Color

- Transparent

Material

- Silicone

Durability and standards

Standards

- REACH (EG 1907/2006)
- food grade wall, complies with: FDA 21 CFR 177.2600
- RoHS

Design and production

Construction outer cover

- Smooth

All information in this technical data sheet has been carefully reviewed; however, no warranty or liability can be accepted for the accuracy, completeness, or currentness of the information provided. Positive pressure and vacuum are operating limit values at 68 °F (20 °C). The bend radius is measured on the inside of the hose bend. Subject to technical changes.

NORFLEX© SIL 408

SKU: 4080000

Inner diameter [mm]	Outer diameter [mm]	Total wall thickness [mm]	Max. production length [m]	Weight [kg]	Article Number
2	4	1	50	0.01	40890200000
2	6	2	50	0.03	40890202163
3	5	1	50	0.01	40890300000
3	7	2	50	0.04	40890302163
3	6	1.5	50	0.03	40890302182
4	6	1	50	0.02	40890400000
4	7	1.5	50	0.03	40890402182
5	7	1	50	0.02	40890500000
5	8	1.5	50	0.04	40890502182
6	9	1.5	50	0.04	40890600000
7	10	1.5	50	0.05	40890700000
8	10	1	50	0.03	40890800000
8	14	3	50	0.11	40890802175
9	13	2	50	0.08	40890900000
10	14	2	50	0.09	40891000000
10	15	2.5	50	0.11	40891002174
12	16	2	50	0.1	40891200000
12	18	3	25	0.17	40891202175
15	21	3	25	0.2	40891500000
16	22	3	25	0.21	40891600000
20	26	3	25	0.27	40892000000
25	31	3	25	0.31	40892500000

All information in this technical data sheet has been carefully reviewed; however, no warranty or liability can be accepted for the accuracy, completeness, or currentness of the information provided. Positive pressure and vacuum are operating limit values at 68 °F (20 °C). The bend radius is measured on the inside of the hose bend. Subject to technical changes.