

TRICOTECH®

SKU: 4100

Smooth, torsion-free water hose, ideal for use in construction, irrigation and as a garden hose.

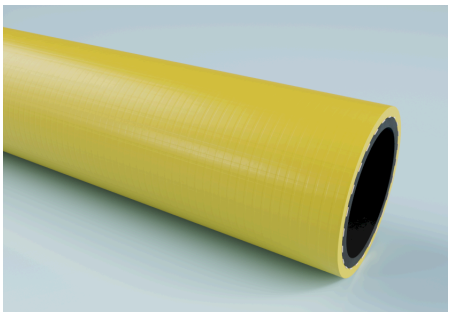

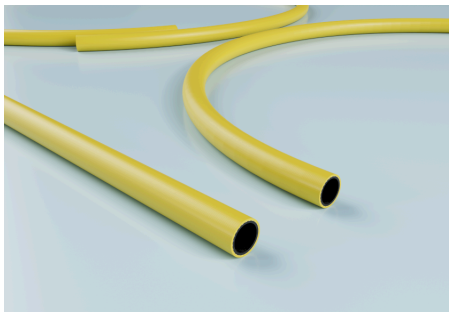

Technical specifications

Medium

· Liquid

Areas of application

Applications

· Irrigation, Water hose, Irrigation

Industries

· Aquaculture, Construction industry, Horticulture

Pressure and temperature

Temperature normal range (min/max)

· -10 °C – 60 °C

Material and color

Color of inner tube core

· black

Color of outer cover

· yellow

Material outer cover

· Soft PVC

Material inner tube

· Soft PVC

Durability and standards

Standards

· EN ISO 1307:2008

Design and production

Construction outer cover

· Smooth

Inserts

· textile plies

All information in this technical data sheet has been carefully reviewed; however, no warranty or liability can be accepted for the accuracy, completeness, or currentness of the information provided. Positive pressure and vacuum are operating limit values at 68 °F (20 °C). The bend radius is measured on the inside of the hose bend. Subject to technical changes.

TRICOTECH®

SKU: 4100

Inner diameter [mm]	Outer diameter [mm]	Working pressure at 20°C [bar]	Burst pressure [bar]	Total wall thickness [mm]	Bending radius [mm]	Max. production length [m]	Weight [kg]	Article Number
12.5	17	10	25	2.25	125	50	0.16	4100012000
15	20	10	25	2.5	125	50	0.19	4100015000
19	25	10	25	3	160	50	0.27	4100019000
25	32	10	25	3.5	200	50	0.42	4100025000
32	42	10	25	5	300	50	0.76	4100032000
40	50	10	25	5	350	50	0.96	4100040000
50	62	10	25	6	400	25	1.42	4100050000

All information in this technical data sheet has been carefully reviewed; however, no warranty or liability can be accepted for the accuracy, completeness, or currentness of the information provided. Positive pressure and vacuum are operating limit values at 68 °F (20 °C). The bend radius is measured on the inside of the hose bend. Subject to technical changes.