

NORPLAST® PVC 379 COSMO®/ELASTICO

SKU: 4405

Highly flexible suction hose, ideal for water, fertilisers and seeds under light conditions in industry and agriculture.



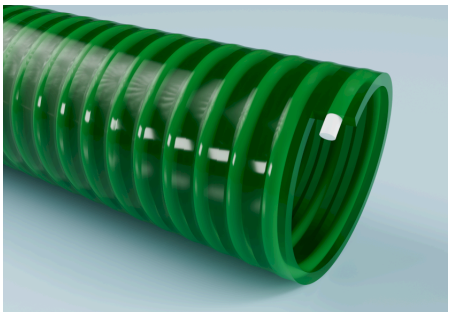

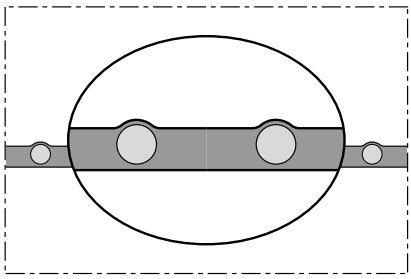

Technical specifications

Medium

- Gas, Dust, Liquid, Solid

Areas of application

Applications

- Suction of water under light operating conditions in industry and agriculture
- Use on vacuum pumps as pond hose
- Use on construction sites for water treatment
- Passage of slurry through slurry injectors
- Drag foot injectors and as seed supply hose

Pressure and temperature

Temperature normal range (min/max)

- -15 °C – 60 °C

Material and color

Color

- Green

Color of spiral

- White

Material

- Soft PVC

Material spiral

- Rigid PVC

Durability and standards

Standards

- EN ISO 1307:2008

Design and production

Construction outer cover

- Smooth

Description

Imprint

- NORPLAST® PVC 379 Cosmo® Elastico - Dimension

All information in this technical data sheet has been carefully reviewed; however, no warranty or liability can be accepted for the accuracy, completeness, or currentness of the information provided. Positive pressure and vacuum are operating limit values at 68 °F (20 °C). The bend radius is measured on the inside of the hose bend. Subject to technical changes.

NORPLAST® PVC 379 COSMO®/ELASTICO

SKU: 4405

Inner diameter [mm]	Outer diameter [mm]	Working pressure at 20°C [bar]	Vacuum [bar]	Total wall thickness [mm]	Bending radius [mm]	Max. production length [m]	Weight [kg]	Spiral thickness [mm]	Spiral pitch [mm]	Article Number
40	47	6	0.6	–	160	50	0.56	–	8,5	4405040000
51	59	5	0.6	–	204	50	0.85	–	9,5	4405050000

All information in this technical data sheet has been carefully reviewed; however, no warranty or liability can be accepted for the accuracy, completeness, or currentness of the information provided. Positive pressure and vacuum are operating limit values at 68 °F (20 °C). The bend radius is measured on the inside of the hose bend. Subject to technical changes.