
ARMOFLEX®/OIL

SKU: 4481

Highly flexible suction and pressure hose for transporting oil, petrol and chemicals, ideal for use in mechanical engineering and waste oil processing.



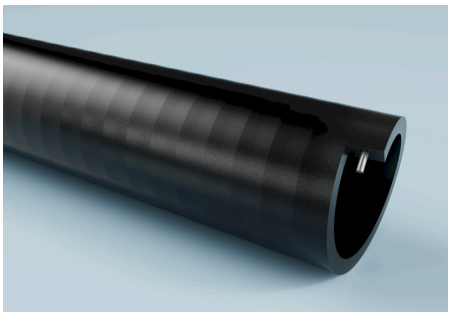

Technical specifications

Medium

· Gas, Liquid

Pressure and temperature

Temperature normal range (min/max)

· -15 °C – 65 °C

Material and color

Color of inner tube core

· black

Color of outer cover

· black

Material outer cover

· NBR/PVC

Material inner tube

· NBR/PVC

Material spiral

· Galvanized steel

Durability and standards

Standards

· EN ISO 1307:2008

Durability outer cover

· Aging-resistant, Weather resistant

Design and production

Construction outer cover

· Smooth

Description

Imprint

· Armoflex® / Oil

All information in this technical data sheet has been carefully reviewed; however, no warranty or liability can be accepted for the accuracy, completeness, or currentness of the information provided. Positive pressure and vacuum are operating limit values at 68 °F (20 °C). The bend radius is measured on the inside of the hose bend. Subject to technical changes.

ARMOFLEX®/OIL

SKU: 4481

Inner diameter [mm]	Outer diameter [mm]	Working pressure at 20°C [bar]	Vacuum [bar]	Total wall thickness [mm]	Max. production length [m]	Weight [kg]	Article Number
25	33	8	0.8	4	30	0.52	4481025000
32	40	7	0.8	4	30	0.72	4481032000
38	47	7	0.8	4.5	30	0.87	4481038000
51	62	5	0.8	5.5	30	1.32	4481050000

All information in this technical data sheet has been carefully reviewed; however, no warranty or liability can be accepted for the accuracy, completeness, or currentness of the information provided. Positive pressure and vacuum are operating limit values at 68 °F (20 °C). The bend radius is measured on the inside of the hose bend. Subject to technical changes.