

NORPLAST 385 AS GRANUFLEX

SKU: 4609

Abrasion-resistant suction and pressure hose with grounding wire, ideal for granules, powders, wood pellets, fibers and insulating materials.



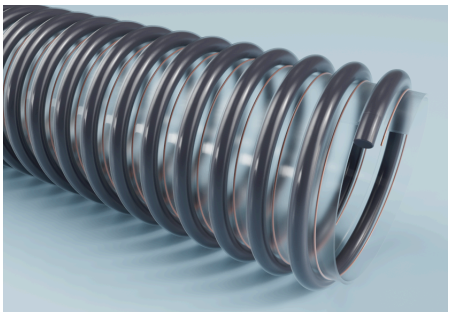

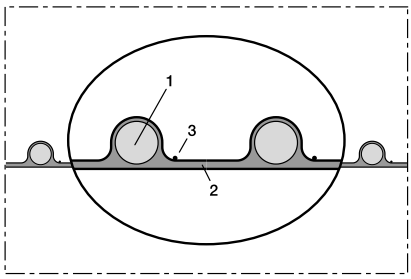

Technical specifications

Abrasion resistance

· Highly abrasion-resistant

Medium

· Gas, Dust, Liquid, Solid

Areas of application

Applications

· flexible hose for granulate, powder and bulk goods, conveying of wood pellets, fibre extraction, insulation blowing machine, blowing in insulation material

Pressure and temperature

Temperature normal range (min/max)

· -25 °C – 85 °C

Material and color

Material wire

· Copper

Color

· Transparent

Color of spiral

· anthracite

Material

· Premium polyester-polyurethane (Pre-PUR®)

Material spiral

· Rigid PVC

Design and production

Construction outer cover

· Corrugated

Inner tube

· Smooth

Description

Imprint

· NORPLAST PUR 385 AS GRANUFLEX - Innendurchmesser mm LotNr.

All information in this technical data sheet has been carefully reviewed; however, no warranty or liability can be accepted for the accuracy, completeness, or currentness of the information provided. Positive pressure and vacuum are operating limit values at 68 °F (20 °C). The bend radius is measured on the inside of the hose bend. Subject to technical changes.

NORPLAST 385 AS GRANUFLEX

SKU: 4609

Inner diameter [mm]	Outer diameter [mm]	Vacuum [bar]	Bending radius [mm]	Max. production length [m]	Weight [kg]	Spiral pitch [mm]	Article Number
38	45	0.2	38	30	0.34	8,5	4609038000
40	47	0.2	40	30	0.35	–	4609040000
45	52.6	0.2	45	30	0.43	–	4609045000
51	59	0.2	51	30	0.45	–	4609050000
60	68.2	0.16	60	30	0.6	10	4609060000

All information in this technical data sheet has been carefully reviewed; however, no warranty or liability can be accepted for the accuracy, completeness, or currentness of the information provided. Positive pressure and vacuum are operating limit values at 68 °F (20 °C). The bend radius is measured on the inside of the hose bend. Subject to technical changes.