


TIMBERDUC® PUR 533 AS

SKU: 5332173

Highly abrasion-resistant suction and discharge hose for the wood industry, antistatic, increased pressure and vacuum resistance, flame-retardant, ideal for woodworking and industry

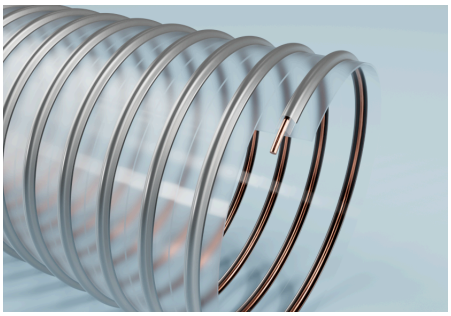

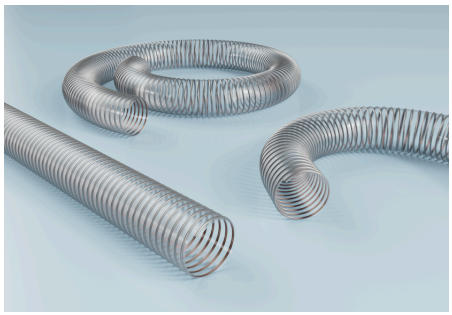

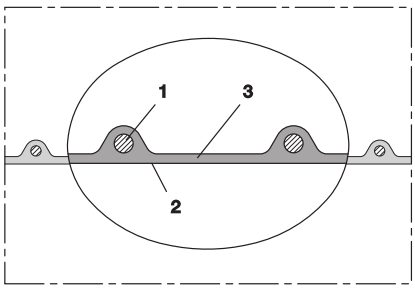

Pressure and temperature

Temperature normal range (min/max)

· -40 °C – 90 °C

Material and color

Color

· transparent + partially silver colored

Material

· Premium polyether polyurethane (Pre-PUR®)

Material spiral

· Spring steel

Durability and standards

Durability inner tube core

· Microbe-resistant, hydrolysis-resistant

Standards

· REACH (EG 1907/2006), flame-retardant according to: DIN 4102-B1, RoHS

All information in this technical data sheet has been carefully reviewed; however, no warranty or liability can be accepted for the accuracy, completeness, or currentness of the information provided. Positive pressure and vacuum are operating limit values at 68 °F (20 °C). The bend radius is measured on the inside of the hose bend. Subject to technical changes.

TIMBERDUC® PUR 533 AS

SKU: 5332173

Inner diameter [mm]	Outer diameter [mm]	Bending radius [mm]	Max. production length [m]	Weight [kg]	Spiral pitch [mm]	Article Number
100	111	98	16	1.2	15	53301002173
104	113	100	15	1.24	15	53301042173

All information in this technical data sheet has been carefully reviewed; however, no warranty or liability can be accepted for the accuracy, completeness, or currentness of the information provided. Positive pressure and vacuum are operating limit values at 68 °F (20 °C). The bend radius is measured on the inside of the hose bend. Subject to technical changes.