
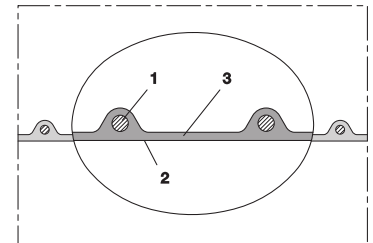
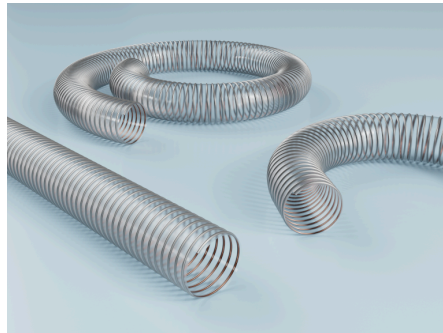


# TIMBERDUC® PUR 533 AS

SKU: 5332173

Highly abrasion-resistant suction and discharge hose for the wood industry, antistatic, increased pressure and vacuum resistance, flame-retardant, ideal for woodworking and industry

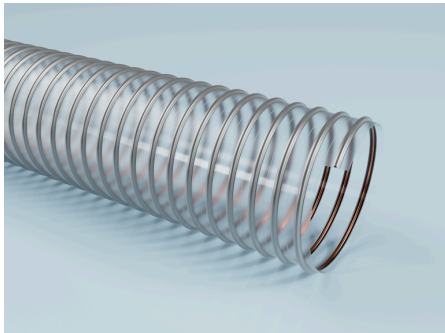

## Durability and standards

Standards:

REACH according to --> Technology /  
Technical Information / REACH  
conforms to RoHS guideline  
flame-retardant according to: DIN 4102-B1

## Pressure and temperature

Temperature normal range from: -40 °C

Temperature normal range to: 90 °C

Inner diameter	Bending radius	Max. production length	Weight	Article Number
[ mm ]	[ mm ]	[ m ]	[ kg ]	
100 mm	98 mm	16 m	1.2 kg	53301002173
104 mm	100 mm	15 m	1.24 kg	53301042173