

INDUCORD®/TC

SKU: 3045

Chemical-resistant special hose with rotating nozzle for demanding cleaning jobs in tanks and silos.

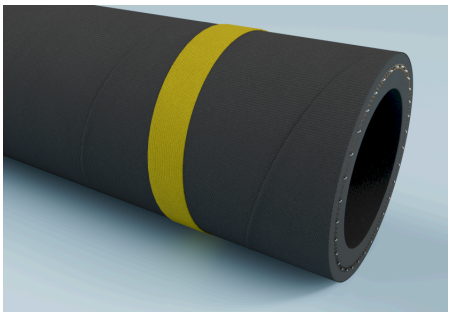

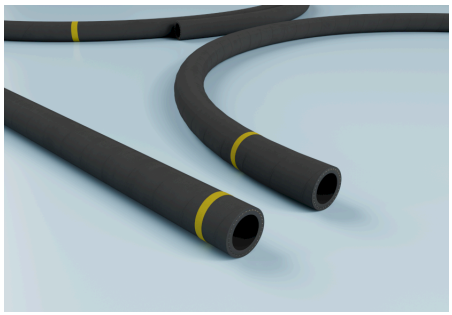

Technical specifications

Medium

· Liquid

Areas of application

Applications

· Silo trucks, Water hose, Plant cleaning, Tank cleaning

Industries

· Chemical industry, Agricultural industry, Construction industry, Horticulture, Cleaning industry, Shipbuilding, Waste disposal and environmental technology, Environmental and cleaning technology, Silo and conveying technology industry

Pressure and temperature

Temperature normal range (min/max)

· -30 °C – 100 °C

Material and color

Material wire

· stainless steel (INOX)

Color of inner tube core

· black

Color of outer cover

· black

Material outer cover

· EPDM

Material inner tube

· EPDM

Durability and standards

Standards

· EN ISO 1307:2008

Design and production

Construction outer cover

· Wrapped

Inserts

· textile plies

All information in this technical data sheet has been carefully reviewed; however, no warranty or liability can be accepted for the accuracy, completeness, or currentness of the information provided. Positive pressure and vacuum are operating limit values at 68 °F (20 °C). The bend radius is measured on the inside of the hose bend. Subject to technical changes.

INDUCORD®/TC

SKU: 3045

Inner diameter [mm]	Outer diameter [mm]	Working pressure [bar]	Burst pressure [bar]	Total wall thickness [mm]	Bending radius [mm]	Max. production length [m]	Weight [kg]	Article Number
38	54	20	60	8	304	60	1.45	3045038000
51	67	20	60	8	408	60	1.88	3045050000

All information in this technical data sheet has been carefully reviewed; however, no warranty or liability can be accepted for the accuracy, completeness, or currentness of the information provided. Positive pressure and vacuum are operating limit values at 68 °F (20 °C). The bend radius is measured on the inside of the hose bend. Subject to technical changes.